

Figure 1

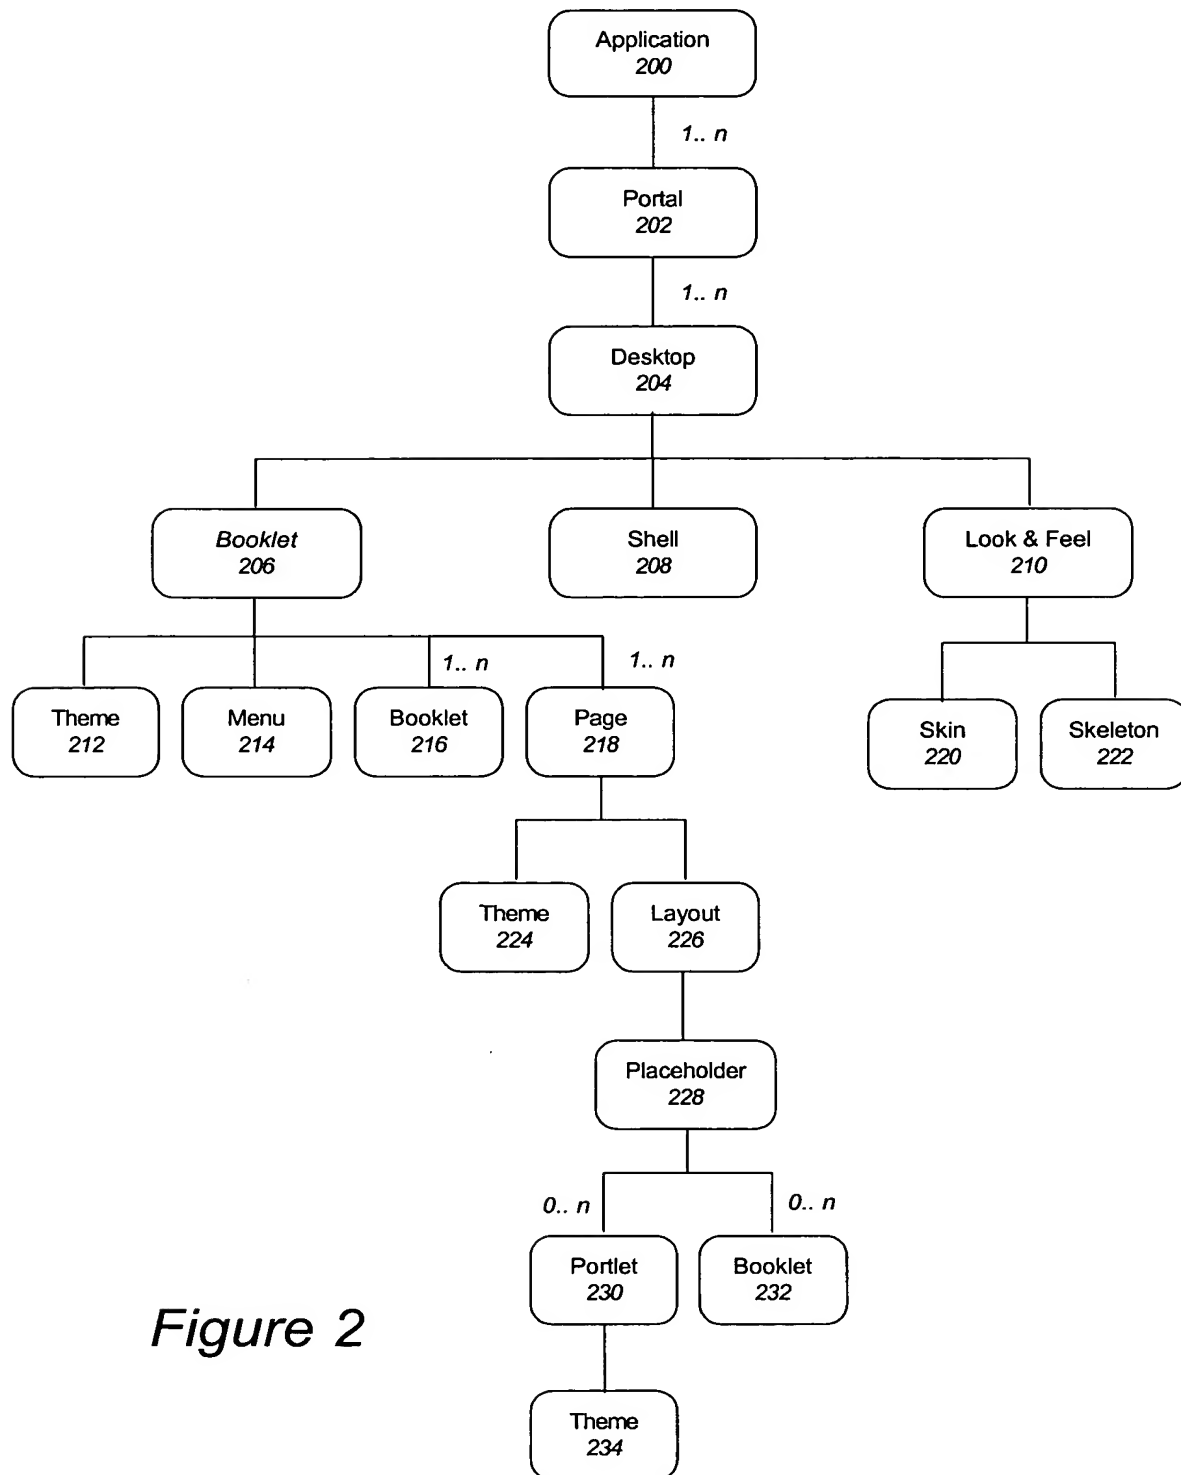


Figure 2

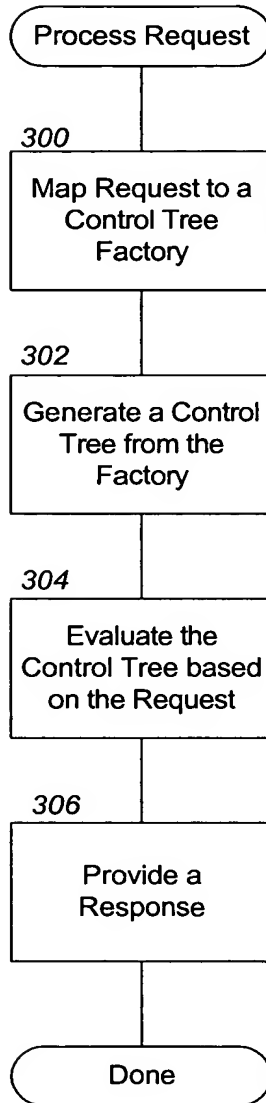


Figure 3

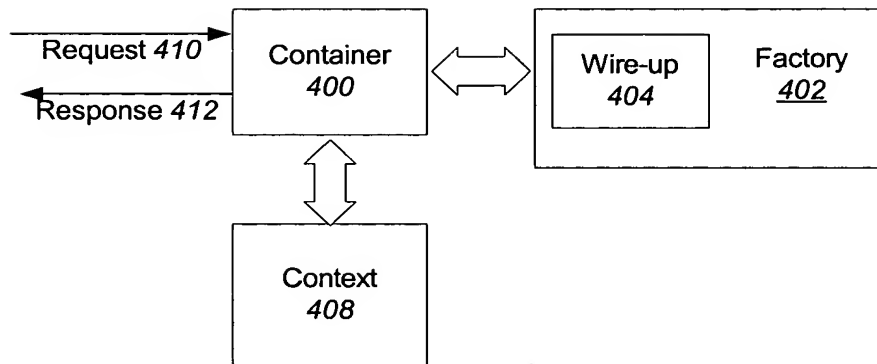


Figure 4

Title: System and Method for Containing Portlets
Inventor(s): Scott Musson et al.
Application No.: Not Yet Assigned
Docket No.: BEAS-01366US0
Filing date: Filed Herewith

Attorney: Daniel J. Burns
Telephone No.: (415) 362-3800
Express Mail No.: EV327621942US

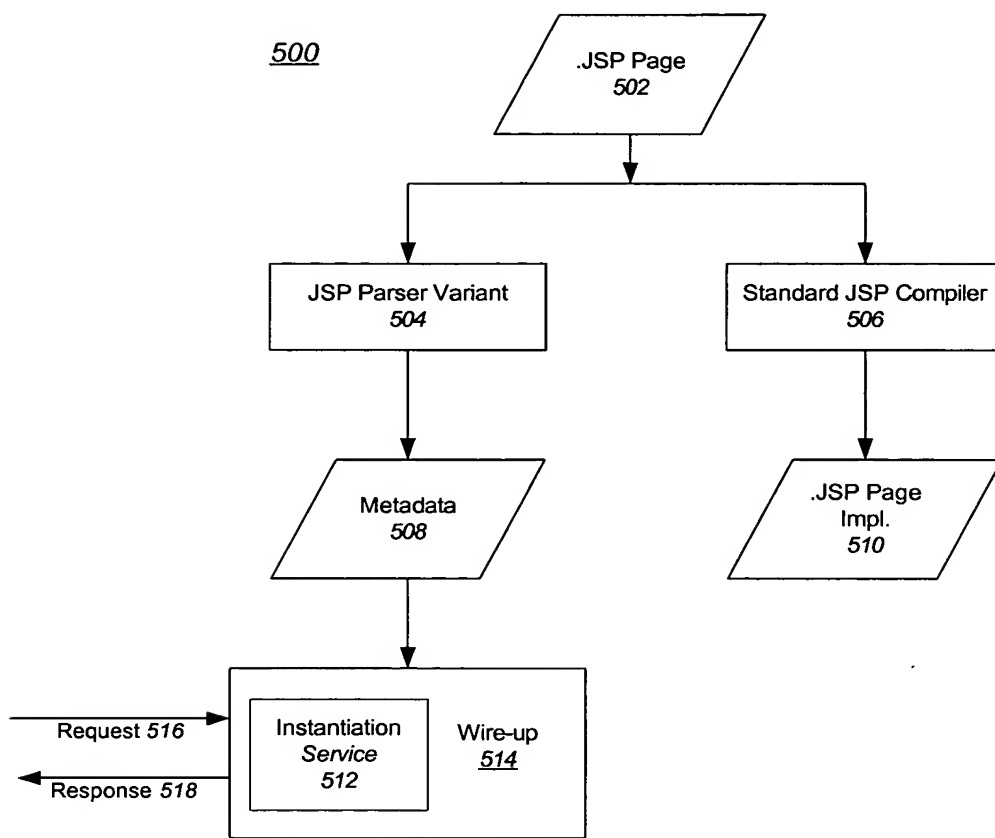


Figure 5

Title: System and Method for Containing Portlets
Inventor(s): Scott Musson et al.
Application No.: Not Yet Assigned
Docket No.: BEAS-01366US0
Filing date: Filed Herewith

Attorney: Daniel J. Burns
Telephone No.: (415) 362-3800
Express Mail No.: EV327621942US

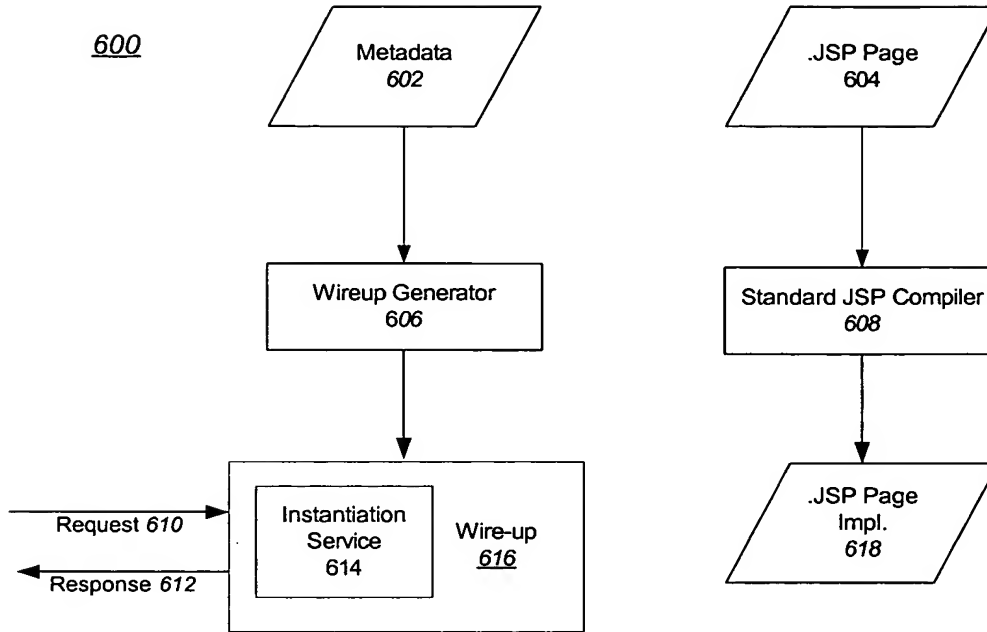


Figure 6

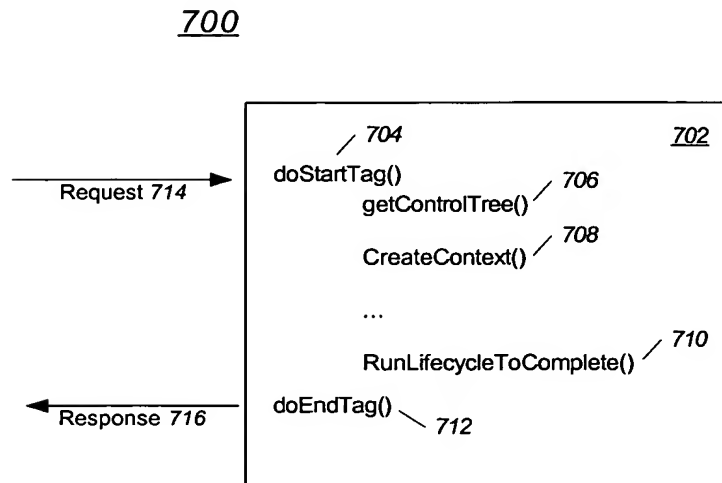


Figure 7

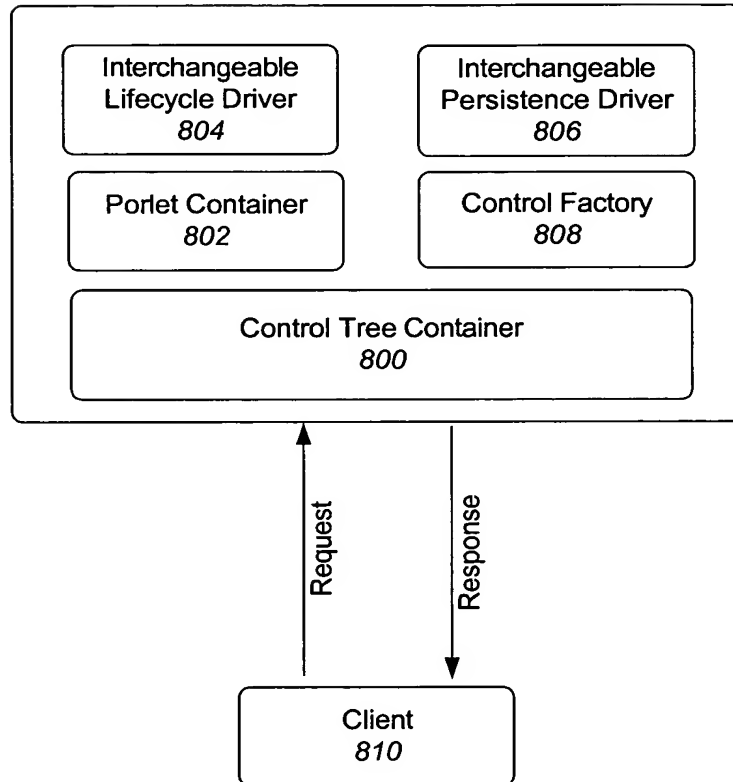


Figure 8


```

<%@page
import="com.bea.netuix.servlets.controls.window.WindowPresentationContext,com.bea.netu
ix.servlets.controls.window.TitlebarContext"
%>
<%@ taglib uri="render.tld" prefix="render" %>
<% WindowPresentationContext window =
WindowPresentationContext.getWindowPresentationContext(request);
    TitlebarContext titlebar
        = (TitlebarContext) window.getFirstChild("window:titlebar");
    String expandWidth = "100%";
%>

<render:beginRender>
<div
    <render:writeAttribute name="id" value="<%= window.getPresentationId() %>"/>
    <render:writeAttribute name="class" value="<%= window.getPresentationClass() %>"
        defaultValue="bea-portal-window"/>
    <render:writeAttribute name="style" value="<%= window.getPresentationStyle() %>"/>
    <render:writeAttribute name="width"
        value="<%= window.isPacked() ? null : expandWidth %>"/>
>
<% if (titlebar != null) { %>
    <render:renderChild presentationContext="<%= titlebar %>"/>
<% } %>
    <div class="bea-portal-window-content">
</render:beginRender>
<render:endRender>
    </div>
</div>
</render:endRender>

```

Figure 9